




CE ISO9001

DNG Series ISO1552 Standard Cylinder



DNG-200×100-S

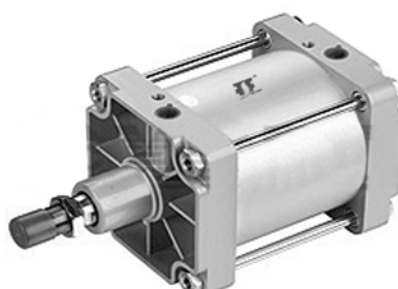

DNG-250×200-S

Ordering Code

DNG

Series Code

DNG:ISO15552 Standard
Double Action Type
DNGD:ISO15552 Standard Two
Axis Double Action Type
DNGJ:ISO15552 Two Axis Stroke Adjust Type

160

Cylinder Bore
160mm-320mm

×

100

Stroke

25

Adjust Storke
25:25mm
50:50mm
75:75mm

S

Magnet Code

Blank:Without Magnet
S:With Magnet

□



Fixed Type

Blank:Normal type
LB:Front and back fixed type
FA:Front cover fixed type(Front flange type)
FB:Back cover fixed type(Back flange type)
CA:Back cover fixed type (Single Earring)
CB:Back cover fixed type(Double Earring)

Specification

Bore(mm)	160	200	250	320
Motion Pattern	Double Action			
Working Medium	Air			
Fixed Type	Normal type	FA type	FB type	CA type CB type LB type TC type
Working Pressure Range	0.1~1.0MPa			
Ensured Pressure Resistance	1.5MPa			
Operating Temperature Range	-5~60℃			
Operating Speed Range	50~500mm/s			
Buffer Type	Adjustable Buffer			
Port Size	G3/4"			G1"
Lubrication	Not required (Use Turbine oil/ISO Vg32 when necessary)			

Overall Dimensions

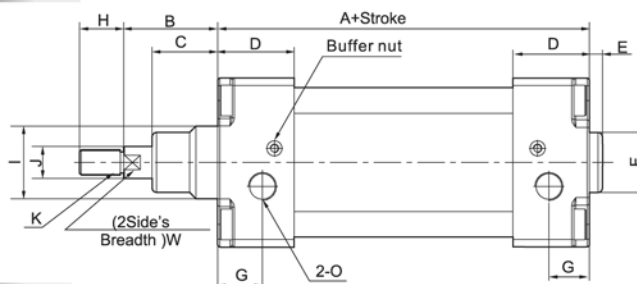

Dimension Sheet

Bore/Symbol	A	B	C	D	E	F	G	H	I	J	K	L	M	S	T	O
160	180	80	60	50	6	Φ65	25	72	Φ65	40	M36×2	M16	Φ25φ30	180	140	G3/4"
200	180	95	70	50	6	Φ75	25	72	Φ75	40	M36×2	M16	Φ25φ30	220	175	G3/4"
250	200	105	67	52	10	90	31	84	90	50	M42×2	M20	Φ30	270	220	G1"
320	218	120	82	52	10	110	31	96	110	63	M48×2	M24	Φ34	340	270	G1"