



CE ISO9001

CU Series Free Installation Cylinder



CDU 25×30



CDUK 16×30

Ordering Code

CU

Series Code
CU:Normal Type
CDU:Attach magnet Type



Kinds
Blank:Normal Type
K:Non-Rotating piston rod Type

10

Cylinder Bore
6mm
10mm
16mm
20mm
25mm
32mm

×

30

Stroke
0~50mm



Action
D:Double action
S:Single Action Spring Drawing-in Type
T:Single Action Spring Extusion Type

Specification

Bore(mm)		6mm	10mm	16mm	20mm	25mm	32mm
Working Medium		Air					
Motion Pattern		Double action/Single Action Extrusion type/Single Action Drawing-in Type					
Ensured Pressure Resistance		1.05Mpa(10.5kgf/cm ²)					
Max. Working-pressure		0.7Mpa(7.1kgf/cm ²)					
Min. operating pressure	Single	0.2MPa	0.15MPa		0.13MPa		
	Double	0.12MPa	0.06MPa		0.05MPa		
Ambient and Medium Temperature		Without auto switch:-10~70℃(No freezing) With auto switch:-10~60℃(No freezing)					
Lubrication		Non-lube					
Piston speed		50-500 mm/s					
Cushion		Rubber bumper ^{Note)}					
Rod end thread		Male thread					
Thread tolerance		Class 2					
Cushion		Both ends buffer					
Margin of Stroke Error(mm)		^{+1.0} ₀ mm					
Precision of Piston rod with Non-rotating		±0.8°			±0.5°		
Port Size		M5×0.8					G1/8"

Note) Φ6 single acting with auto switch type: One side rubber bumper.

Standard stroke

	Bore size (mm)	Standard stroke(mm)
Double Acting	6,10,16	5,10,15,20,25,30
	20,25,32	5,10,15,20,25,30,40,50
Single Acting	6,10,16,20,25,32	5,10,15




CE ISO9001

CU Series Free Installation Cylinder


Overall Dimensions

Double Acting, Single Rod

$\phi 6 \sim \phi 10$

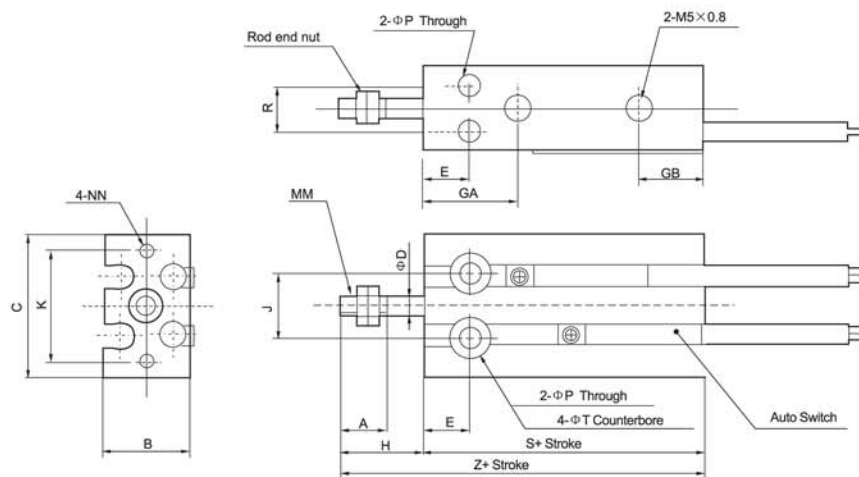

$\phi 16 \sim \phi 32$

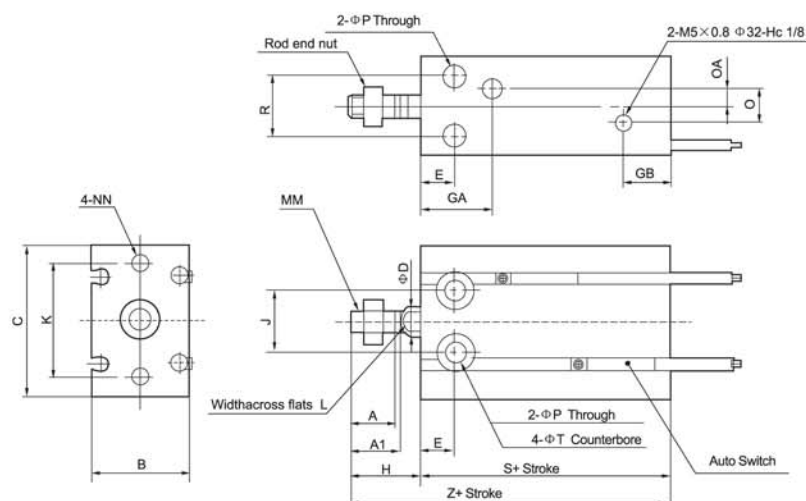

Dimension Sheet

缸径/Bore size(mm)	A	A1	B	C	D	E	GA	GB	H	K	J	L	MM
6	7	-	13	22	3	7	15	10	13	17	10	-	M3×0.5
10	10	-	15	24	4	7	16.5	10	16	18	11	-	M4×0.7
16	11	12.5	20	32	6	7	16.5 ^{Note)}	11.5	16	25	14	5	M5×0.8
20	12	14	26	40	8	9	19	12.5	19	30	16	6	M6×1.0
25	15.5	18	32	50	10	10	21.5	13	23	38	20	8	M8×1.25
32	19.5	22	40	62	12	11	23	12.5	27	48	24	10	M10×1.25

Bore size (mm)	NN	P	Q	QA	R	T	Without Auto Switch		With Auto Switch	
							S	Z	S	Z
6	M3×0.5 depth 5	3.2	-	-	7	6 depth 4.8	33	46	33	46
10	M3×0.5 depth 5	3.2	-	-	9	6 depth 5	36	52	36	52
16	M4×0.7 depth 6	4.5	4	2	12	7.6 depth 6.5	30	46	40	56
20	M5×0.8 depth 8	5.5	9	4.5	16	9.3 depth 8	36	55	46	65
25	M5×0.8 depth 8	5.5	9	4.5	20	9.3 depth 9	40	63	50	73
32	M6×1.0 depth 9	6.6	13.5	4.5	24	11 depth 11.5	42	69	52	79

Note)5 (CU16-5D):14.5mm

Note)5 Stroke(CU16-5D):14.5mm




CE ISO9001

CU Series Free Installation Cylinder


Overall Dimensions

Single Acting, Spring Extend

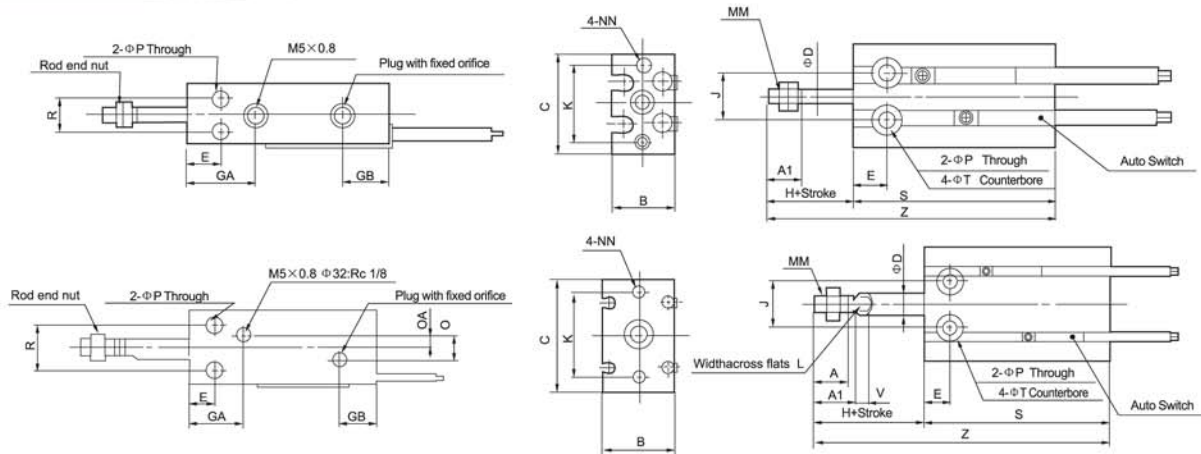

Overall Dimensions

Single Acting, Spring Return

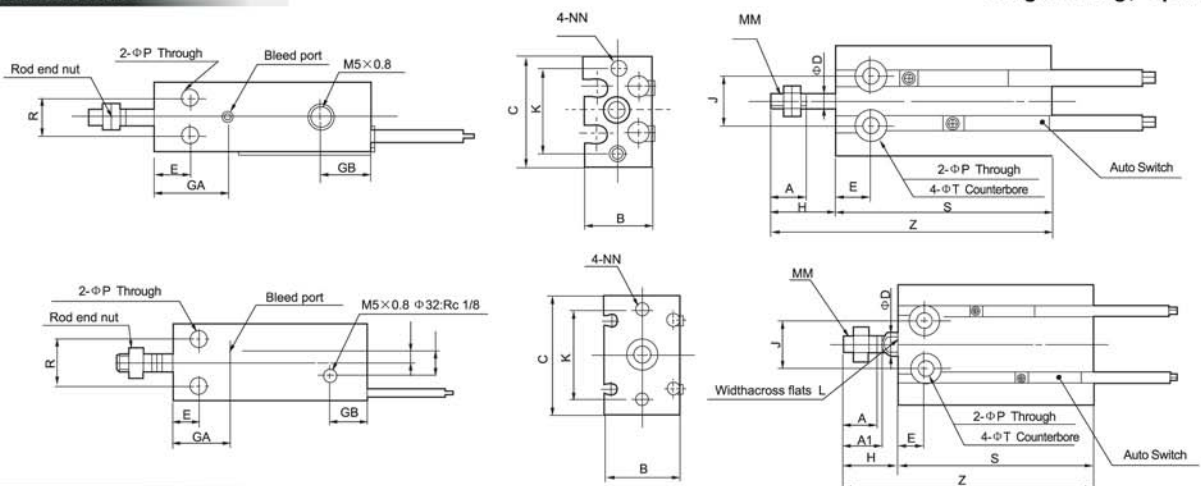

Dimension Sheet

Bore size(mm)	A	A1	B	C	D	E	GA	GB	H	K	J	L	MM	NN	P
6	7	-	13	22	3	7	15	10	13	17	10	-	M3×0.5	M3×0.5 (depth) 5	3.2
10	10	-	15	24	4	7	16.5	10	16	18	11	-	M4×0.7	M3×0.5 (depth) 5	3.2
16	11	12.5	20	32	6	7	16.5	11.5	16	25	14	5	M5×0.8	M4×0.7 (depth) 6	4.5
20	12	14	26	40	8	9	19	12.5	19	30	16	6	M6×1.0	M5×0.8 (depth) 8	5.5
25	15.5	18	32	50	10	10	21.5	13	23	38	20	8	M8×1.25	M5×0.8 (depth) 8	5.5
32	19.5	22	40	62	12	11	23	12.5	27	48	24	10	M10×1.25	M6×1.0 (depth) 9	6.6

Bore size (mm)	Q	QA	R	T	V (Note)	Without Auto Switch						With Auto Switch					
						S			Z			S			Z		
						5st	10st	15st	5st	10st	15st	5st	10st	15st	5st	10st	15st
6	-	-	7	6 (depth) 4.8	-	38	43	48	56	66	76	38	43	48	56	66	76
10	-	-	9	6 (depth) 5	-	41	46	56	62	72	87	41	46	56	62	72	87
16	4	2	12	7.6 (depth) 6.5	3.5	45	50	60	66	76	91	45	50	60	66	76	91
20	9	4.5	16	9.3 (depth) 8	5	41	46	56	65	75	90	51	56	66	75	85	100
25	9	4.5	20	9.3 (depth) 9	5	45	50	60	73	83	98	55	60	70	83	93	108
32	13.5	4.5	24	11 (depth) 11.5	5	47	52	62	79	89	104	57	62	72	89	99	114

Note) "V" Only for Single Acting, Spring Extend